


KEY FEATURES

- Projects 1280 x 1024 pixels, for real SXGA / MAC21 resolution.
- 2300 ANSI Lumens bright at 85% uniformity with a 400:1 contrast ratio.
- Projects images up to 40' wide (615" diagonal) over distances up to 101'.
- 200 MHz dot clock for compatibility with most workstations.
- Smart data compression/expansion: compatibility up to UXGA / down to VGA.
- Digital Connectivity: DFP graphics adapter & data input, Panel Link™ technology
- HDTV Ready: 1080i, 720p and 1035i compatible.
- Progressive video scaling resizes the video image beautifully.
- Accepts Composite, Component, and S-Video Input. Displays 4:3 and 16:9.
- Multi-Format Video: NTSC / PAL / SECAM / NTSC 4.43 / PAL-M.
- Power Lens Shift offsets the image in both directions: up & down.
- Optional Telephoto, Midrange and WideAngle Lenses.
- 3 Year* Projector Warranty! 3 Month* Lamp Warranty!

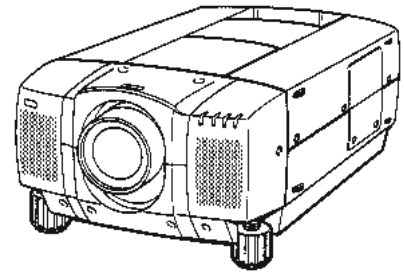

OTHER IMPORTANT FEATURES

- **Included Accessories:** Owner's Manual. AC Power Cord, Lens Cap. PCI bus Graphics Adapter. DFP cable. VGA cable.
- **MAC Adapter.** Wireless Remote Control with Mouse and Laser Pointer & 2 x AA batteries. Mouse cables for PS/2, Serial Port, ADB
- **Port.** Wired Remote Control & 2 x AA batteries & 5' (1.5m) cord.
- **Optional Accessories:** Replacement Lamp. MAC Monitor Cable. PCMCIA DFP adapter. 10m DFP cable. 13W3 Input / Output Adapter. Telephoto, Midrange and WideAngle Lenses. Soft Carry Bag with wheels and telescoping handle. Hard Shipping Case with wheels and telescoping handle. Ceiling Mount and Post & Plate.

SPECIFICATIONS:

Screen Brightness 2300 ANSI Lumens
 Illumination Uniformity 85%
 Size of Color Palette 16.7 Million
 Contrast Ratio 400:1 (ANSI 100:1)
 Horizontal Resolution 800 TV Lines
 Projection Lamp 400 Watt Metal Halide
 Estimated Lamp Life 750 Hrs.
 Recommended Lamp Replacement 600 Hrs.
 Imaging System 1.8" PolySilicon active matrix TFT Panels x3
 Screen Pixels 1280 x 1024 in stripe configuration
 Total Pixels 3,935,216 ((1280 x 1024) x 3)
 Lens Type Power Zoom and Focus
 Lens Speed & Focal Length .. f:2.0~2.3; 2.98~3.84 in. (75.7~97.5mm)
 Lens Ratios Zoom Max:Min: 1.29:1; Throw:Width: 2.1~2.7:1
 Image Diagonal 40~615 in.
 Image Width 2.6 ~ 40 ft. (0.8 ~ 12.2 m.)
 Throw Distance 5.3 ~ 101 ft. (1.6 ~ 30.9 m.)
 Front Elevation / Maximum Tilt up to 4° up
 Anti Keystone Power Lens Shift, Ratio (T:B) 10:0~0:10
 Scanning Frequency Auto: H Sync. 15-100Hz; V Sync. 50-100Hz
 Dot Clock 200 MHz
 Image Orientation Normal, Reversed (projector does not invert)
 Local Control Full Function
 Remote Projector & Mouse Ctrl ... Wireless (Infra Red x 1) w/ Pointer
 Mouse Control Ports Two Sets: 12 Pin DIN x 1, USB port x 1
 Remote Projector Control Wireless (Infra Red) / Wired x 1
 Projector Control Ports Mini Stereo x1
 RS-232 Control Port (Serial Port type) Dsub 9 x 1
 Computer Native Resolution 1280 x 1024 (SXGA/MAC 21)
 Computer Compatibility UXGA, SXGA, XGA, SVGA, VGA & MAC

Computer: Higher Resolution Displayed panned or Smart compressed
 Computer: Lower ResolutionDisplayed normal or Smart expanded
 Computer: Channels.....2
 Computer: Input: Channel 1 HDB15 x 1 & MDR20 (DFP Port) x 1
 Computer: Input: Channel 2 5 BNC (R,G,B,H,V) x 1
 Computer: Monitor Out HDB 15 x1
 Computer: Audio Input Two Sets: RCA x 2 (Stereo)
 Video: Standards NTSC / PAL / SECAM / NTSC 4.43 / PAL-M
 Video: Formats Supported Normal 4:3 and Wide Screen 16:9
 Video: Image Sizing Progressive Video Scaling
 Video: Channels 2
 Video: Systems Composite, Component, S-Video
 Video: Input Connections Two Sets: BNC x 3, S-Video x 1
 Video: Audio: Input Two Sets: Stereo: RCA x 2 (L&R)
 Video: Monitor Output Systems Composite, Component, S-Video
 Video: Audio Monitor Output..... Stereo: RCA x 2
 Audio Output: Amplifier 3 Watts RMS (each L&R) Stereo
 Audio Output: Speakers 2 x 3.5 in. (5x9cm) x 2
 Fan Noise 45 dB
 Size (H x W x D) 9.2x15.4x22.9 in. (233.6x390x581.5 mm.)
 Weight 39.3 lbs. (17.8 kg)
 Packaged Size (H x W x D) .. 16.3x21.1x28.8 in. (412x534x730 mm.)
 Packaged Weight 50.7 lbs. (23 kg)
 Power Requirements 100-120/200~240V AC, 50/60Hz
 Power Consumption / Heat .. 630 Watts / 2,150 BTU/hr. (542 KC/hr.)
 Power Cord 10' (3M) Type 3, Detachable
 Safety Compliance UL Listed
 User Maintenance Clean Air Filter, Replace Lamp
 Warranty Projector 3 Yr / 6000 Hr *(Parts & Labor to Correct Defects)
 Warranty Lamp 3 Mo/500 Hr *(Pro-Rata Replacement of Failed Lamp)
 * Whichever occurs first

CAUTION

Laser Radiation - Do not stare into beam. Max. Output: 1 m W. Wave Length: 660+/- 20mm. Class II Laser Product.
 This warning is required by the US FDA regarding the laser pointer in the remote control of this projector.

Specifications subject to change without notice. ©1999 Eiki International, Inc. Issued September 1, 1999,